



Innovative Accessory Provider

Installation Instructions for zSight® Invisible Shield fits Cisco MX Series



zCover Inc. 100-13551 Verdun Place,
Richmond, BC V6V 1W5 Canada
Tel: 604-273-3003, Fax: 604-273-3023
www.zcover.com

Disclaimer

The information contained in this document is subject to change without notice. zCover or zSight makes no representations or warranties with respect to the contents hereof, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose.

© 2015 zCover Inc. All rights reserved.



**Handle film carefully at all
time to prevent creasing.**

What are Included:

zSight® Invisible Shield for Cisco MX Series display
zAccessory - 30' 3M Double Sided Tape Pack with Tape Scissors
Installation manual

INSTALLATION GUIDE

zSight® Invisible Shield for Cisco MX Series

PID: CIMX7FMD zSight® Invisible Shield for Cisco TelePresence MX700 Series 55-inch Screen, Double Screen Pack with Double Sided Tape and Scissor

CIMX8FMD zSight® Invisible Shield for Cisco TelePresence MX800 Series 70-inch Screen, Double Screen Pack with Double Sided Tape and Scissor

CIMX8FMS zSight® Invisible Shield for Cisco TelePresence MX800 Series 70-inch Screen, Single Screen Pack with Double Sided Tape and Scissor

What's needed for Optimum installation:

- Better to have 2 people
- Low or Dust-free environment
- A clean sturdy flat work surface
- Non-shedding, anti-static wipes
- Anti-static dryer sheets

Preparation

- Clean up work surface. Remove any residual dust / debris.

Caution! Handle film carefully at all time to prevent creasing

- Take out the film and put it on the flat work surface.
- Make sure the film is flat. You may need to roll the film in the other direction to make it flat.
- Wipe both sides of film with an anti-static dryer sheet to neutralize static charges
- Remove MX device frames (please refer to the MX product manual) (Figure 1)
- Clean MX screen(s). Remove any residual dust / debris.

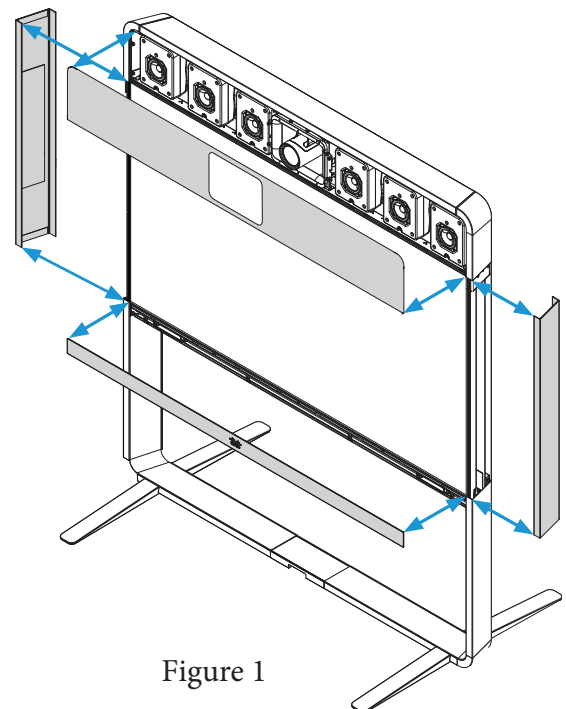


Figure 1

Installation

Caution! Handle film carefully at all time to prevent creasing

For the easiest installation, apply the film prior to setting up the MX series screen on the foot stand or wall mount, while screen is lying flat on the floor.

1. Unroll the film and roll it the opposite direction so that it lays flat;
2. Make sure the LCD surface is clean;
3. Apply a strip of the included double sided tape along each edge of the LCD. Press the tape firmly to the LCD. Do NOT peel off the protective cover from the tape at this time;
4. Once the tape is applied to all four edges of the LCD, peel off the protective covering;
5. With two people, apply the smoother side of the film to the LCD screen by starting from one corner of the bottom edge and pressing the film to the LCD from the one side to the further edges to achieve the best fit;
6. Apply even pressure to the edges to ensure the screen protective film is firmly in place;

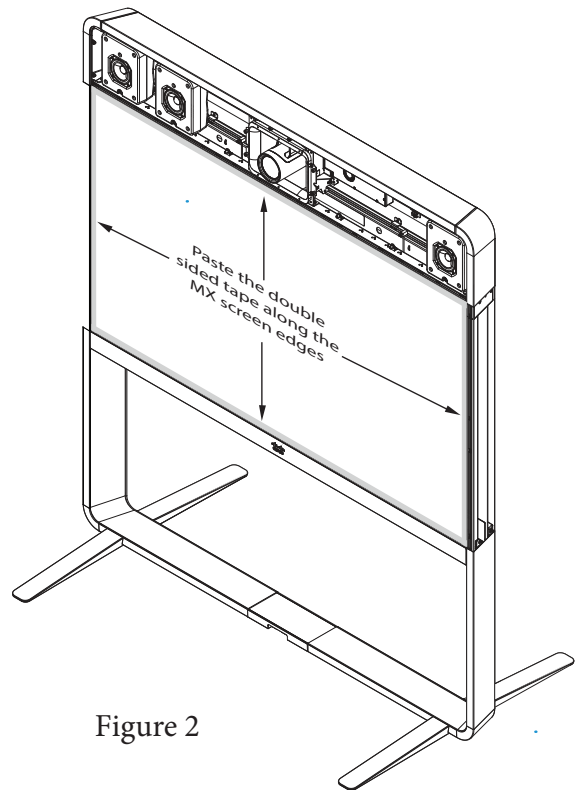


Figure 2

Visit our Web Site
<http://www.zcover.com>