zDock® Desktop Multi-Battery Charger Set in 5-Bay Rack fits Cisco 8821/8821-EX Wireless IP Phone Battery
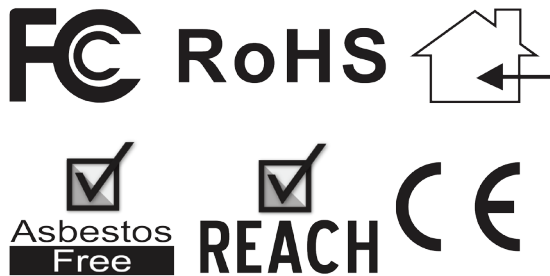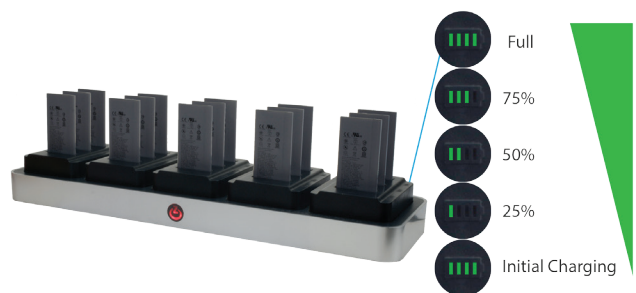

zDock® CI821U5B Desktop Multi-Battery Charger Set in 5-Bay Rack fits Cisco 8821/8821-EX Wireless IP Phone Battery Charges up to 15 Cisco 8821/8821-EX Wireless IP Phone batteries at the same time. It is certified safe and environmentally compliant, meeting or exceeding regulatory standards. The features intelligent battery temperature monitoring and 4 LED battery charging process indicator on each slot make this charger one of a kind. It keeps your batteries charged, ensuring that your phones are ready for continuous use over an extended period of time, so you will never have to worry about running out of power again.

- A top quality Battery Charger set for Cisco 8821/8821-EX Wireless IP Phone Batteries in the market
- Charges up to 15 Batteries at the same time
- Complete compliance with environmental and safety standards
- Easy to use: monitor battery charging process with 4 LED indicator lights on charger
- Switches to trickle charge when battery is tested full by battery voltage
- Safety first: intelligent battery temperature monitor discontinues charging when battery temperature reaches 113 F (45C)
- High-powered fast charging delivers twice the output of other power supplies
- Can be placed on a desk or mounted on the wall to save space
- Part of the zCover Unified Modular Docking System: can be docked into zCover Unified Dock Racks to form a Multi-Charger and customized by mixing a Multi-Charger with other Unified Desktop Dual Chargers or Unified Multi-Battery Chargers

Battery Charge Indicator

Full
75%
50%
25%
Initial Charging

zCover Unified Modular Docking System

Specifications			
Dimensions	19.5 x 5.5 x 2.5in; 495 x 140 x 64 mm	Operating Temperature	32°F to 113°F (0°C to 45°C)
Package Dimensions	20.5 x 7 x 5.5 in; 520 x 178 x 140 mm	Storage Temperature	-22°F to 140°F (-30°C to 60°C)
Net Weight	2090 g; 4.6 lb	Relative Humidity	10 to 95% (no condensing)
Gross Weight	2470 g; 5.45 lb	Handset Connector	Magnetic USB 2.0 connector
Power Supply	INPUT: AC100-240V 50/60Hz 2.5A; OUTPUT: DC12.0V 7000mA		
What's in the box	5 x zDock® Desktop Multi-Battery Charging Dock ONLY fits Cisco 8821/8821-EX Wireless IP Phone Battery, to Charge THREE (3) Batteries Simultaneously with 4 LED Indicator Light 1 x ZDUPSR5K zAdapter® Unified Power Dock Rack, FIVE (5) Bay, with NO Power Adapter 1 x ZDP12V7B zAdapter® 12V 7A Power Adapter, for 5V-12V Duo-Voltage Unified Power Rack 1 x ZDADBTXX Series zAdapter® ZDADB AC Power Cord Plug for 5V60W AC Adapter XX = AU (Australia), EU (Continental Europe), JP (Japan), NA (North America) or UK (United Kingdom)		

Part ID Number	Description
CI821U5B-NA	zDock® Desktop Multi-Battery Charger Set in 5-Bay Rack fits Cisco 8821/8821-EX Wireless IP Phone Battery, with North America Plug Connector Power Adapter
CI821U5B-JP	zDock® Dual Charging Dock in 5-Bay Rack with Dock-in-Case® Solution fits Cisco 8821/8821-EX Wireless IP Phone and Battery, with Japan Plug Connector Power Adapter
CI821U5B-UK	zDock® Desktop Multi-Battery Charger Set in 5-Bay Rack fits Cisco 8821/8821-EX Wireless IP Phone Battery, with United Kingdom Plug Connector Power Adapter
CI821U5B-EU	zDock® Desktop Multi-Battery Charger Set in 5-Bay Rack fits Cisco 8821/8821-EX Wireless IP Phone Battery, with Continental Europe Plug Connector Power Adapter
CI821U5B-AU	zDock® Desktop Multi-Battery Charger Set in 5-Bay Rack fits Cisco 8821/8821-EX Wireless IP Phone Battery, with Australia Plug Connector Power Adapter

Replacement Part	Description
CI821UBK	zDock® Desktop Multi-Battery Charging Dock ONLY fits Cisco 8821/8821-EX Wireless IP Phone Battery, to Charge THREE (3) Batteries Simultaneously with 4 LED Indicator Light
ZDUPSR5K	zAdapter® Unified Power Dock Rack, FIVE (5) Bay, with NO Power Adapter
ZDP12V7B-IP	zAdapter® 12V 7A Power Adapter ONLY (no AC Power Cord Plug)
ZDACUACK-XX	zAdapter® AC to DC 5V 2.0A Single USB Standard-A Port Power Adapter, BLACK, with Power Plug XX = AU (Australia), EU (Continental Europe), JP (Japan), NA (North America) or UK (United Kingdom)

Version: 1.0.0